




T SERIES

Thermoforming Granulators

Technical Specifications

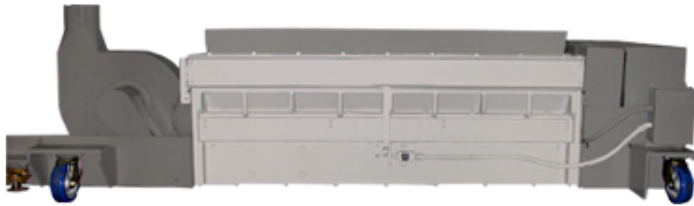

Thermoform Series Granulators are ideal for inline processing of thermoformed scrap. The T Series units are part of a family of thermoforming granulators that are designed to process a wide range of materials. Our granulators are robustly designed and have the built-in capability for continuous or cut sheet scrap reclamation. Expertly designed infeed systems ensure smooth processing of materials from startup through full-speed operation. Turn to the experts in size reduction to find a granulator ideal for your specific application needs.

Features

Standard Features

- 3 knife rotor
- Precision machined internal surfaces maximize material flow
- Outboard mounted bearings reduce contamination risk and support maintenance
- Multiple safety features built in every unit
- NEMA 12 controls
- 3/16", 1/4", 5/16", 3/8" screens
- Safety interlocks
- Low-profile infeed system
- Machined, bolted cutting chamber for simplified cleaning
- Easily removable screens in drop-down cradle for quick removal and maintenance

Optional Features


- Alternative horsepower options
- Multiple infeed & hopper designs
- Paddle wheel infeed assembly

T Series

Specifically designed for continuous reclamation of skeletal web directly from the thermoform trim press, available with 36" or 56" infeed widths. T Series has integral mounted feedrolls or paddle wheels for a low profile height that can fit under the press.



T Series

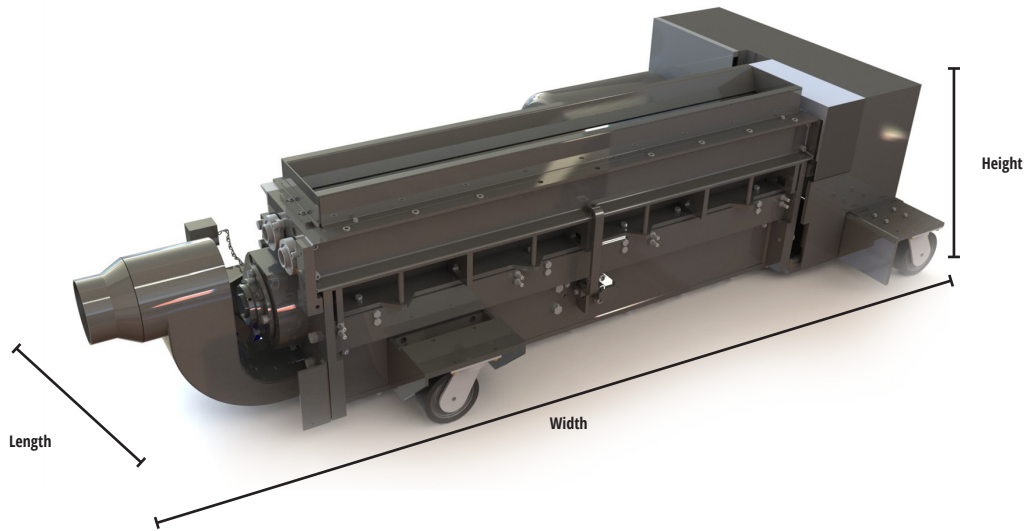

Model	Cutting Chamber	Throughput	Standard Motor	Dimensions (W x L x H)	Weight
36T	8" x 36" (20cm x 91cm)	1000 lbs/hr (454 kg/hr)	7.5 hp (5.7 kW)	74.86" x 51" x 24.48" (190cm x 130cm x 62cm)	2600 lbs (1181 kg)
56T	8" x 56" (20cm x 142cm)	1300 lbs/hr (591 kg/hr)		94.86" x 51" x 24.48" (241cm x 130cm x 62cm)	2900 lbs (1305 kg)